






# Καυστήρες πετρελαίου



UNI EN ISO 9001:2000



Σειρά  
G

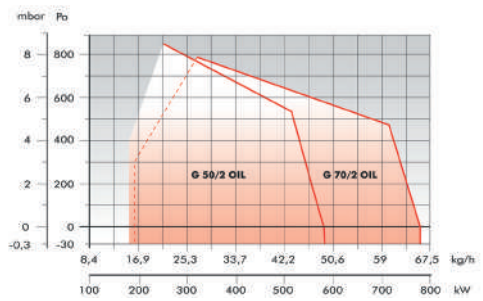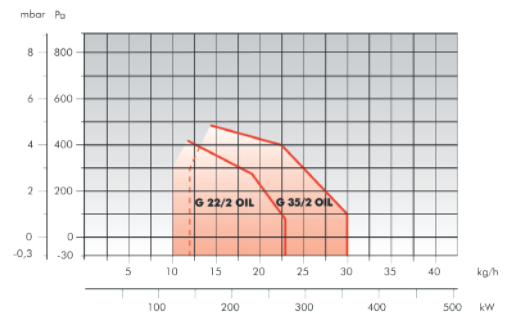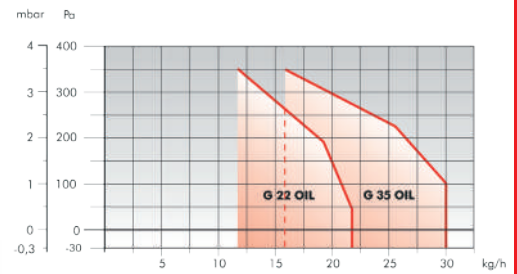


## ΤΕΧΝΙΚΑ ΧΑΡΑΚΤΗΡΙΣΤΙΚΑ

### ΜΟΝΟΒΑΘΜΙΟΙ


### ΔΙΒΑΘΜΙΟΙ

Μοντέλο	G 22 OIL		G 35 OIL		G 22/2 OIL		G 35/2 OIL		G 40/2 OIL		G 50/2 OIL		G 70/2 OIL	
Ικανότητα min-max	(kcal) 117.300 - 224.400 (kW) 136,4-260,9		163.000-306.000 190,0-356,0		101.900-234.600 118,6-272,7		122.400-306.000 142,0-356,0		229.000-408.000 267,0-474,0		152.300-503.200 177,0-585,0		169.100-667.600 196,7-776,3	
Κατανάλωση καυσ. Στάδιο 1 min-max (kg/h) Στάδιο 2	11,5-22,0 --		16,0-30,0 --		10,0-12,5 2,0-10,5		12,0-17,0 2,0-13,0		22,5-25,0 4,0-15,0		15,0-29,0 6,5-20,0		16,5-40,5 10,5-24,5	
Τάση (V-Hz)	230-50 Μονοφασικός		230-50 Μονοφασικός		230-50 Μονοφασικός		230-50 Μονοφασικός		230-50 Μονοφασικός		230/400-50 Τριφασικός		230/400-50 Τριφασικός	
Κινητήρας (W)	250		370		250		370		550		1100		1500	
Πυκνωτής (μF)	8		10		8		14		--		--		--	
Ισχύς εισόδου (W)	600		850		650		900		950		1500		1900	
Τάμπερ αέρα	Χειροκίνητο													
Τιμή (€)	781,97		1.092,62		1.081,91		1.306,86		1.713,92		2.528,03		2.827,96	

ΠΛΑΓΙΑ ΟΨΗ

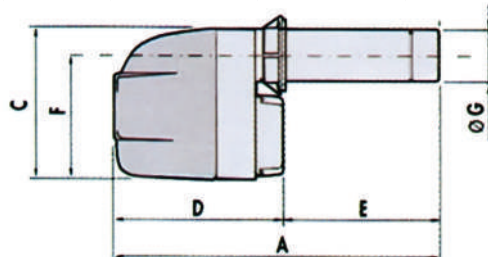

ΕΜΠΡΟΣΘΙΑ ΟΨΗ



## ΔΙΑΣΤΑΣΕΙΣ

Μοντέλο	G 22 OIL	G 35 OIL	G 22/2 OIL	G 35/2 OIL	G 40/2 OIL	G 50/2 OIL	G 70/2 OIL
A - B (mm)	576-360	790-420	676-360	790-420	703 (803)-540	1040-420	1080-420
C (mm)	356	423	356	423	392	490	490
D - E (mm)	320-256	460-330	320-356	460-330	540-163(328)	655-385	695-385
Φ G (mm)	120	135	120	135	140	140	170
Φ X (inch)	1/4-3/8	3/8	1/4-3/8	1/4-3/8	3/8	3/8	3/8
Βάρος (kg)	20,0	26,5	20,0	27,0	24,0	55,0	59,0

Οι τιμές επιβαρύνονται με ΦΠΑ • Η εταιρεία διατηρεί το δικαίωμα αλλαγής των τιμών χωρίς προειδοποίηση