

# R290

# HYUNDAI

## Air to Water Heat Pump



### **Monoblock R290 Air Source Heat Pump**



# Natural refrigerant R290

R290, a highly pure propane with zero ODP value, does not have ozone depletion potential. The low GWP value further demonstrates its environmental protection characteristics, which provides great support to reach EU carbon neutrality. Thanks to the excellent thermodynamic properties of R290 and the advanced heat pump technology, with only a small amount of R290, Monoblock R290 heat pumps show great performance under cold condition. So it is a modern solution that balances ecosystem requirements with economic performance.



## Wide capacity range

Capacity (kW)		4	6	8	10	12	14	16
Power supply	220~240V-1N-50Hz	●	●	●	●	●	●	●
	380~415V-3N-50Hz					●	●	●
Appearance								

## Electric heater

Electric heater is an ideal option that balances thermal comfort with economy performance under extreme cold climate.

The electric heater with 3~9kW heating capacity can be integrated inside heat pump, which is both a installation space-saving and installation cost-effective solution.



# Powerful heating



55°C hot water under -25°C  
ambient temperature




75°C hot water under -10°C  
ambient temperature

## Ideal for replacement

The main energy source for Monoblock heat pump is free-of-charge natural energy from the air. With only a small amount of electrical energy, Monoblock heat pump can provide heat for your house. Compared with boiler, Monoblock heat pump is a more efficient product with environmental protection. On the other hand, the powerful heating capacity of providing 75°C hot water makes it suitable for replacing or retrofitting the current heat source.



Traditional boiler heating

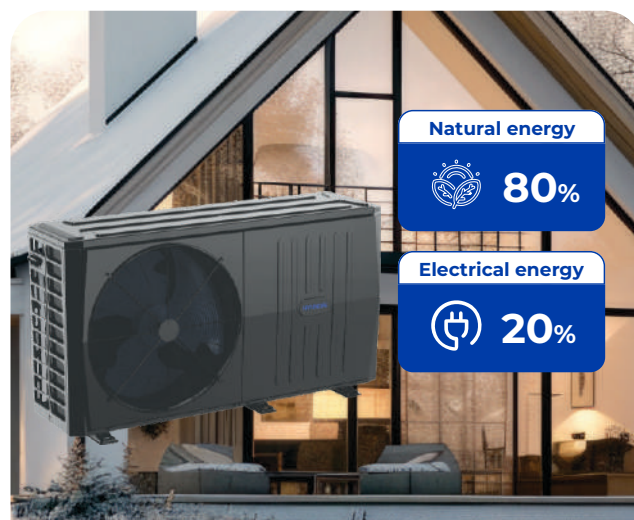

Heat pump heating

The data is only applied for some models under A7W35, which is for understanding and reference only.

The result may vary depending on different products.

Please refer to the specification for more details.



# High reliability


R290 Monoblock heat pump adopts well-known brand components and advanced manufacturing processes to ensure product reliability. It is worth mentioning that, in order to best reassure customers about the use of R290 heat pump, the electric control system adopts a hermetic design to further improve the overall reliability.

## 1. Advanced manufacturing technology




## 2. All DC Inverter components


DC Inverter




DC Inverter fan



DC Inverter Compressor



DC Inverter water pump

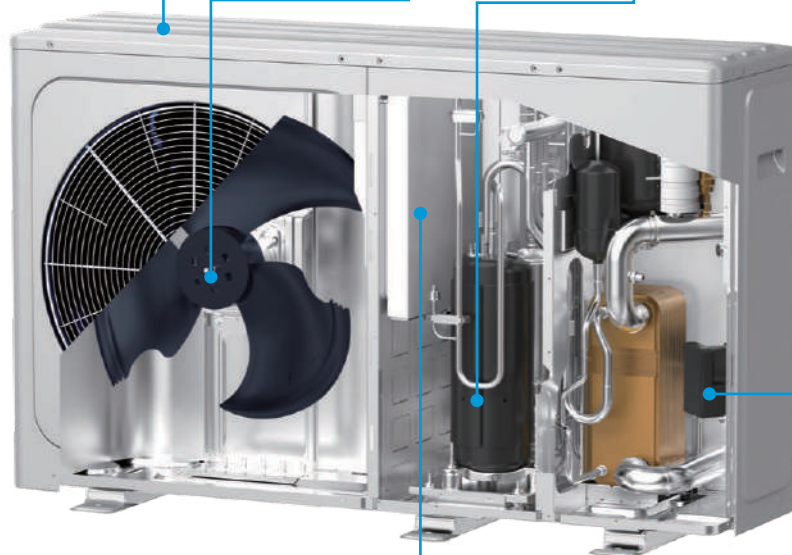

## 3. Hermetic electric control box



- Excellent sealability

Thanks to the special air flue design and multiple simulations, the heat dissipation rate of electric control system has been greatly improved, which provides a strong support for heat pump to run stably under  $-25^{\circ}\text{C}\sim 46^{\circ}\text{C}$  wide ambient temperature range



- Explosion-proof design




Fuse




Relay



Varistor



Wind simulation



Temperature simulation

# High efficiency

Energy efficiency label indicates the energy efficiency level and performance data of heat pump. The purpose of energy efficiency label is to provide necessary information for users to make purchase decisions, so as to help users to choose highly energy-efficient and energy-saving products. With the help of all DC inverter technology, R290 Monoblock Series reaches the EU Energy Efficiency A+++ at 35°C water temperature, A++ at 55°C water temperature, which ensures users get a better experience with a more economical and reasonable cost.



## User friendly controller




- Color screen
- Intuitive interface
- Touch-key design
- Liquid crystal display
- Built-in Wifi module
- Modbus protocol
- APP control
- Non-polarized wiring connection



### iLetComfort APP



- Designed for end-user
- Easy setting
- Monitor unit status and energy consumption
- Convenient remote control

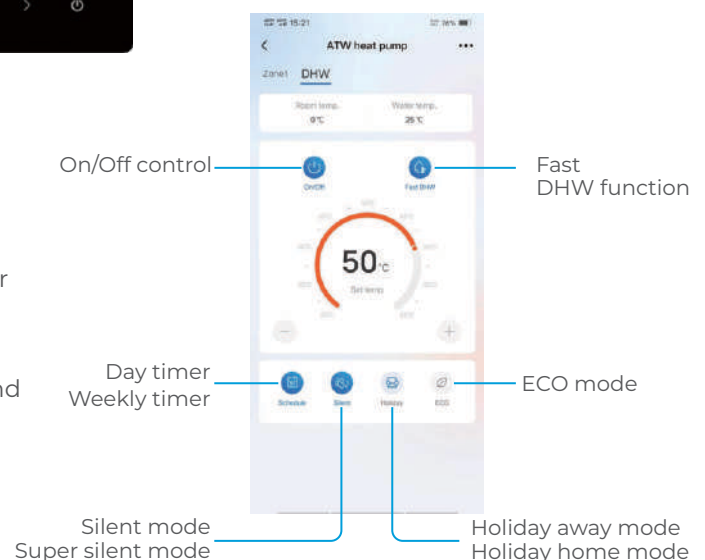

# Specifications



Model			HYHC-V4WD2N7	HYHC-V6WD2N7	HYHC-V8WD2N7	HYHC-V10WD2N7	HYHC-V12WD2N7	HYHC-V14WD2N7	HYHC-V16WD2N7	HYHC-V12WD2RN7	HYHC-V14WD2RN7	HYHC-V16WD2RN7	
Power supply			220-240V-50Hz	220-240V-50Hz	220-240V-50Hz	220-240V-50Hz	220-240V-50Hz	220-240V-50Hz	220-240V-50Hz	380-415V-3N-50Hz	380-415V-3N-50Hz	380-415V-3N-50Hz	
Heating A7W35	Capacity	W	4500	6200	8400	10000	12000	14000	15000	12000	14000	15000	
	Rated input	W	874	1265	1680	2128	2500	3111	3409	2500	3111	3409	
	COP		5.15	4.90	5.00	4.70	4.80	4.50	4.40	4.80	4.50	4.40	
Heating A7W45	Capacity	W	4500	6400	8200	10000	12000	14000	15000	12000	14000	15000	
	Rated input	W	1111	1684	2130	2740	3243	4000	4478	3243	4000	4478	
	COP		4.05	3.80	3.85	3.65	3.70	3.50	3.35	3.70	3.50	3.35	
Heating A7W55	Capacity	W	4600	6200	7800	9500	12000	14000	15000	12000	14000	15000	
	Rated input	W	1438	2000	2438	3115	3871	4667	5263	3871	4667	5263	
	COP		3.20	3.10	3.20	3.05	3.10	3.00	2.85	3.10	3.00	2.85	
Heating A2W35	Capacity	W	4400	5600	7100	8200	9100	10800	12800	9100	10800	12800	
	Rated input	W	1073	1436	1844	2247	2395	3086	4000	2395	3086	4000	
	COP		4.10	3.90	3.85	3.65	3.80	3.50	3.20	3.80	3.50	3.20	
Heating A-7W35	Capacity	W	4500	5900	7000	8000	10000	11500	12700	10000	11500	12700	
	Rated input	W	1452	2000	2333	2807	3571	4259	5080	3571	4259	5080	
	COP		3.10	2.95	3.00	2.85	2.80	2.70	2.50	2.80	2.70	2.50	
Cooling A35W18	Capacity	W	4500	6500	8300	10000	12000	14000	16000	12000	14000	16000	
	Rated input	W	818	1275	1612	2105	2667	3333	4103	2667	3333	4103	
	EER		5.50	5.10	5.15	4.75	4.50	4.20	3.90	4.50	4.20	3.90	
Cooling A35W7	Capacity	W	4700	6800	7500	8900	11500	12700	14000	11500	12700	14000	
	Rated input	W	1288	2194	2174	2738	3770	4379	5091	3770	4379	5091	
	EER		3.65	3.10	3.45	3.25	3.05	2.90	2.75	3.05	2.90	2.75	
SCOP	Average climate, W35	A+++											
	Average climate, W55	A++											
ErP sound power level		dB	56	58	60	61	65	65	69	65	65	69	
Refrigerant	Type(GWP)	R290(3)											
	Charged volume	g	700		1100			1250					
Unit dimension (W×H×D)		mm	1299×717×426			1385×865×523							
Packing dimension (W×H×D)		mm	1375×885×475			1465×1035×560							
Net weight		kg	90			117		135			137		
Gross weight		kg	110			139		157			159		
Water side Connection dimension			G1"BSP			G1 1/4"BSP							
Outdoor air temperature range	Cooling	°C	-5~46										
	Heating	°C	-25~35										
	DHW	°C	-25~46										
Water setting temperature range	Cooling	°C	5~30										
	Heating	°C	12~75										
	DHW	°C	10~70										

## Note:

The above data test reference standard EN14511; EN14825; EN50564;EN 12102; (EU) No:811

Ver. 202504V1EN

# HYUNDAI

## Air to Water Heat Pump

