




HXE310

Three Phase
Smart DC Meter

Focus on creating value for clients

HXE310

HXE310 is a smart three phase direct connected meter. Enable utilities to monitor all essential factors of power grid such as voltage, current, power factor and power quality items. Hot plug module design enable utilities to deploy it in different environments with different communication requirements. As multiple I/O extensible property is an important factor in smart meter to guarantee future smart grid application.

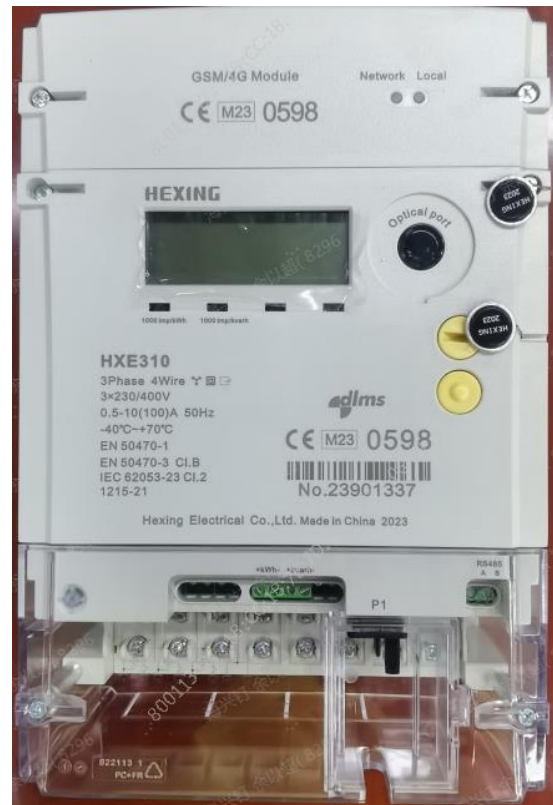

Main functionalities

Measurement

- 3P4W/3P3W connection
- Direct connection
- Import & Export & Total & Net kWh
- Import & Export kvarh
- Four-quadrant kvarh
- Total & Per tariff

Instantaneous Values

- Power, voltage, Current
- Power Factor, Frequency

Power Quality Monitoring


- Under & Over voltage
- Power down
- Reverse Energy Sense
- Low power factor, Low & High Frequency

Events & Alarm

- Multiple kinds of events
- Up to 100 records for individual kind of event
- Pre-programmed Alarms for meter Self-check
- Alarms, tamper and power quality trigger event log
- Alarms indicator (LCD)

LCD

- Display area size 64.5mm×23mm
- Display digital size 8.4mm×5mm
- Backlight
- Configurable automatic & manual display list
- Test mode
- OBIS codes (according to IEC62056-61)

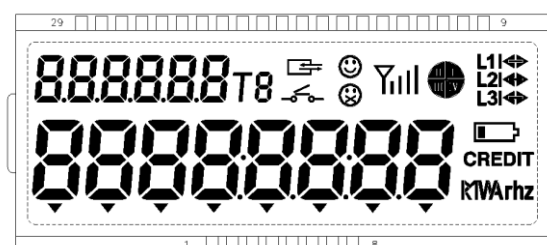

RTC (Real Time Clock)

- Quartz crystal time resource
- Remote & Local synchronization
- Gregorian calendar
- DST (Daylight Saving Time, optional)
- Lithium battery(exchangeable/inner) or/and super capacitor

Billing Data

- 13 monthly billing periods
- 62 daily billing periods
- Automatic reset/ Manual reset

Local access

- PC software
- HHU
- 3 data access levels
- Data access management for all ports
- Metrology data protection

Load Profile

- Up to 2044k bytes of non-volatile memory
- Over 100 days storage (8 channel, 15 minutes)
- Up to 60 channels per profile
- Capture period (0,1,5,15, 30, 60, ...1440 min)
- Energy, power, voltage, current, frequency etc.

Communication

- Optical port: IEC62056-21E or HDLC
- RS485 port(RJ12 or two wired): IEC62056- 21E or HDLC
- Hot-plug module: GPRS, 3G, RF,4G
- Up to 3 Independent communication ports
- P1 port: Communication standards: DSMR P1 5.0.2(optional)
- Data encryption schemes to ensure the data security in communication

Anti-Tamper

- 7 sealing position (2 terminal cover, 2 main cover, 2 module cover and 1 Sealable button)
- Main & Terminal & Module cover removal detection
- Reverse current
- Strong magnetic field detection (optional)

Demand Monitoring

Block/Slide mode

- Programmable integration period (1~60 minutes)
- Import & Export Active MD
- Import & Export Reactive MD
- Import & Export Apparent MD
- Pre-set time (automatic) MD reset
- Manual reset (button/ communication) MD reset
-

TOU (Tariff Of Use)

Up to 4 tariffs

- Up to 8 day tables, Up to 8 divisions per day
- Up to 8 week tables
- Up to 6 season tables
- Up to 50 holiday & special days tables


Load control

- Remotely disconnect and reconnect
- Manually reconnect at the status of ready for connection
- Locally disconnect and reconnect, e.g. power limiter control

Specifications


Application		Direct connection
Accuracy	Active	Class 1 (IEC) / Class B (EN)
	Reactive	Class 2 (IEC)
Voltage	Reference voltage	3P4W: 3×230/400V
	Operating voltage range	80%-120%Un
Current	Basic current	5A, 10A
	Maximum current	80A, 100A
	Starting current	≤0.4%Ib
Frequency		50Hz or 60Hz
Temperature	Operation range	-40℃~70℃
	Limit range for storage and transport	-40℃~70℃
Humidity		Up to 95% non-condensing
Power Consumption	Power consumption in voltage circuit (active)	≤2W
	Power consumption in voltage circuit (apparent)	≤10VA
	Power consumption in current circuit	≤2 VA
Insulation Strength	AC voltage test	4kV during 1min
	Impulse voltage test	1.2/50μs mains connections 6kV
EMC	Electrostatic discharges(Contact discharges)	8kV
	Electrostatic discharges(Air discharges)	15kV
	Surge immunity test	4kV
	Fast transient burst test	4kV
	Electromagnetic RF fields (80MHz to 2000MHz)	10V/m(with current),30V/m(without current)
Connection		9.5mm or 10mm
Terminals(diameter)		
Housing	Protection degree	IP54(indoor)
	Meter cover	Polycarbonate + GF with a transparent window
	Meter base	Polycarbonate + GF
	Terminal cover	Polycarbonate + GF
Communication Interface	Optical communication	IEC62056-21E or HDLC
	RS485	IEC62056-21E or HDLC
Weight	Net weight	Approx.1.80kg
	Package	Approx.0.1kg
Dimension (H x W x D)	With long terminal cover	255mm×170mm×91mm
Standard		IEC62052-11, IEC62053-21, IEC62053-23, IEC62056-21, IEC62056-42, IEC62056-46, IEC62056-47, IEC62056-53, IEC62056-61, IEC62056-62, EN50470-1, EN50470-3

■ Dimensions

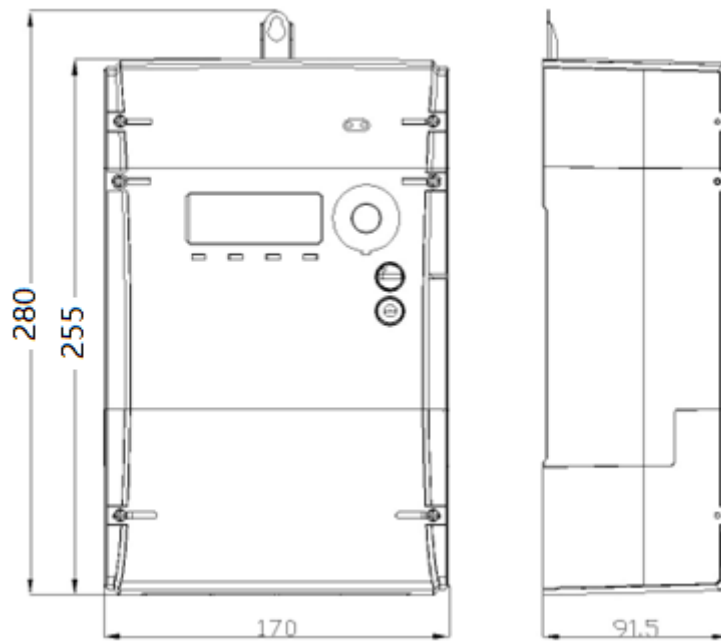


Dimension of smart meter (long terminal cover 25mm)

■ Terminal drawing

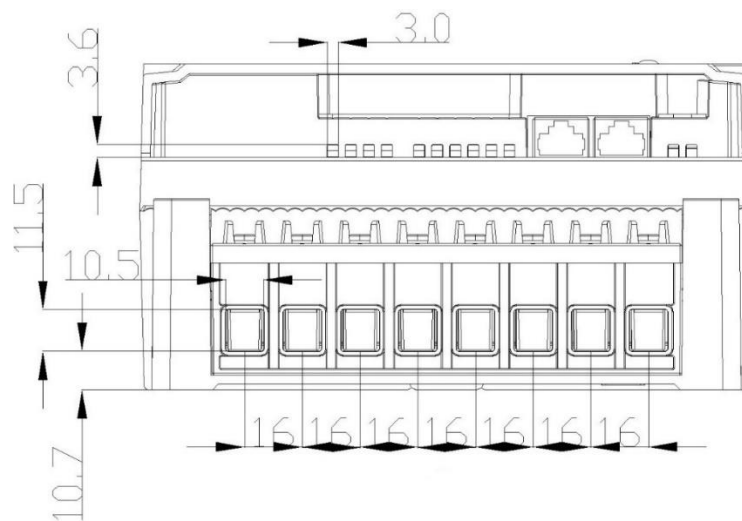


Dimension of Terminal Block

■ Installation Dimension

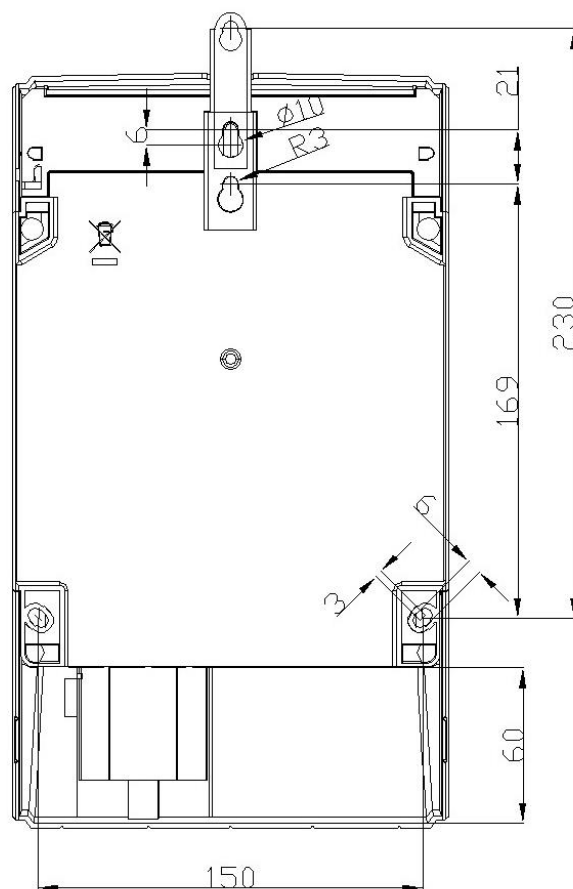

■ Connection Diagram

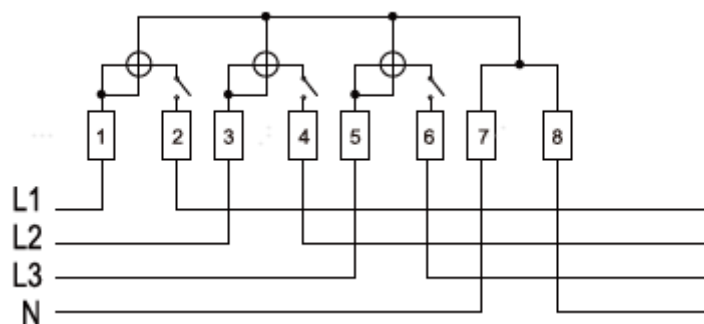

3P4W Asymmetric Connection

COMPANY HEADQUARTERS

Add: 1418-5 Moganshan Road,
Shangcheng Industrial Zone, 310011,
Hangzhou City, China

Tel: 86 571 28029898

Fax: 86 571 28029258

To realize a sustainable future, start here
www.hxgroup.cn